


FULL HEIGHT TURNSTILE


DUAL LANE

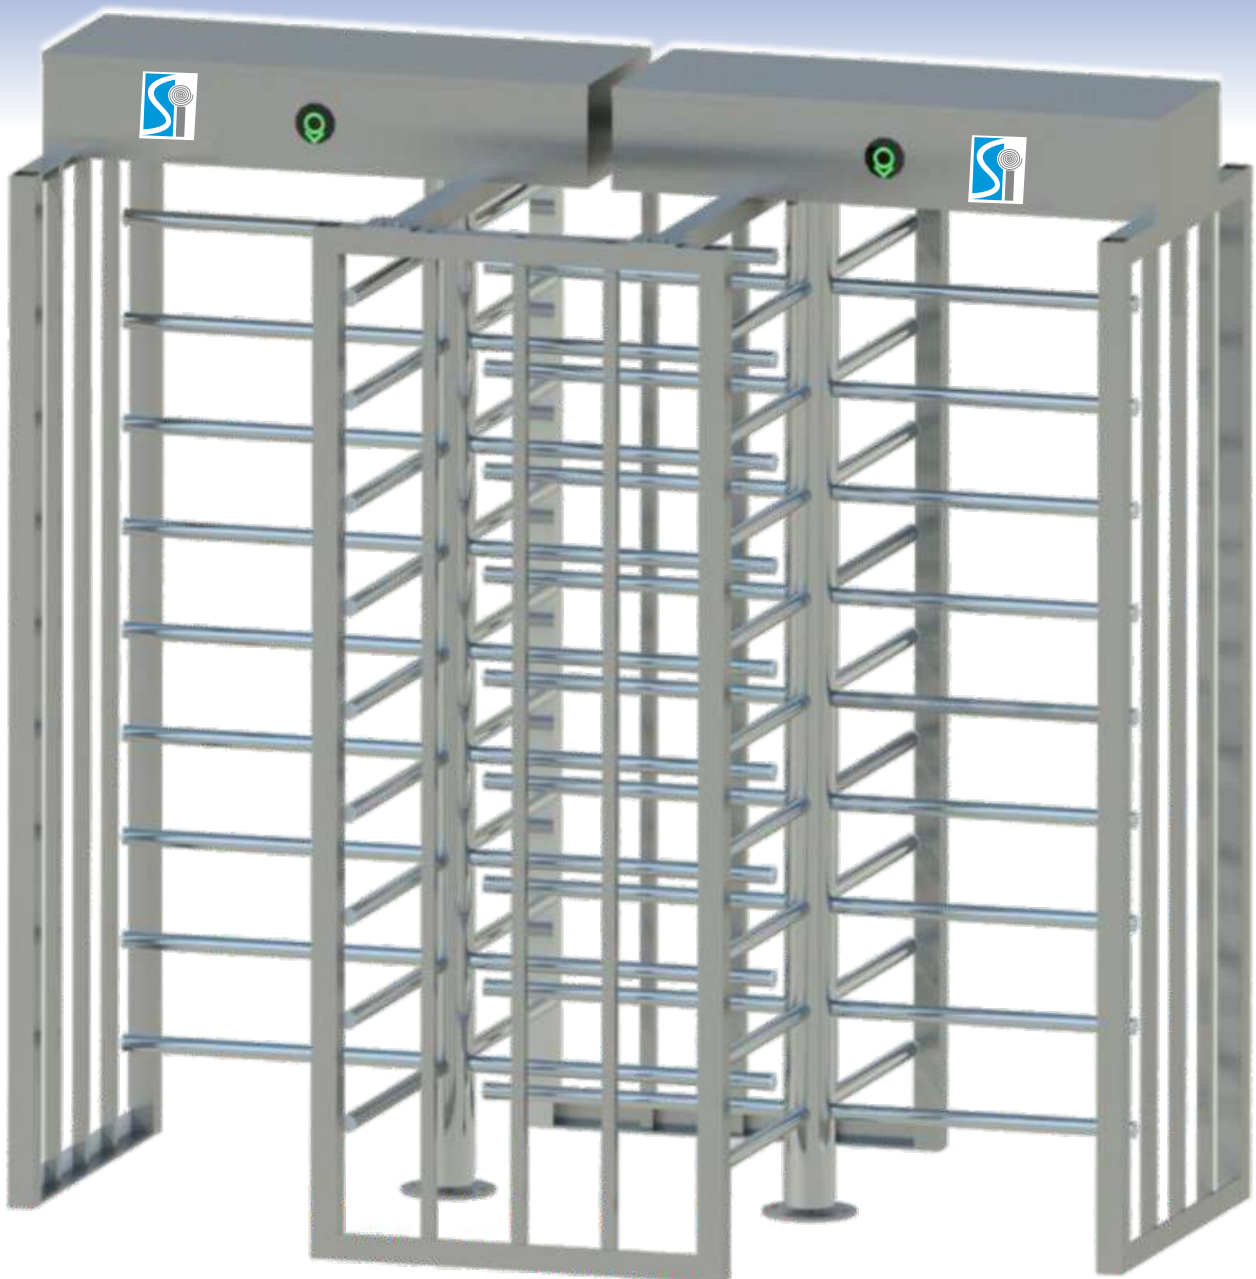

Technical Specification:

❖ Supply Voltage	: 230VAC $\pm$ 10%
❖ Power Consumption	: 5-20 Watt
❖ Drive Technology	: Dual 90° Electro-Mechanical Drive or Motor Drive*
❖ Communication Protocol*	: USB or RS485 or RS232
❖ Integration*	: 4 Inputs, 4 PFC outputs & Optional RS485
❖ Access Time Out	: 0 -15 sec (Adjustable)
❖ Duty Cycle	: Intensive use
❖ Cabinet Material	: Available in Stainless Steel Grade 304/316* Or Mild Steel
❖ Arm material	: Stainless Steel Grade 304
❖ Cabinet Dimension	: L 1440mm * W 2220mm * H 2200mm $\pm$ 5%
❖ Passage Width	: 650mm
❖ Lane Indicator	: Built-in (Green or Red)
❖ Throughput	: 20-25 persons/minute
❖ M.C.B.F.	: 10 million cycles
❖ Operating Temperature	: -10 to 55° C
❖ Installation	: By anchor bolts on plain surface
❖ Included Accessories	: Mains Cable, Foundation Bolts etc.
❖ Optional Accessories	: Digital IN-OUT Counter, Wireless Remote, S.S. Railings, Canopy etc.

General Arrangement Drawing:

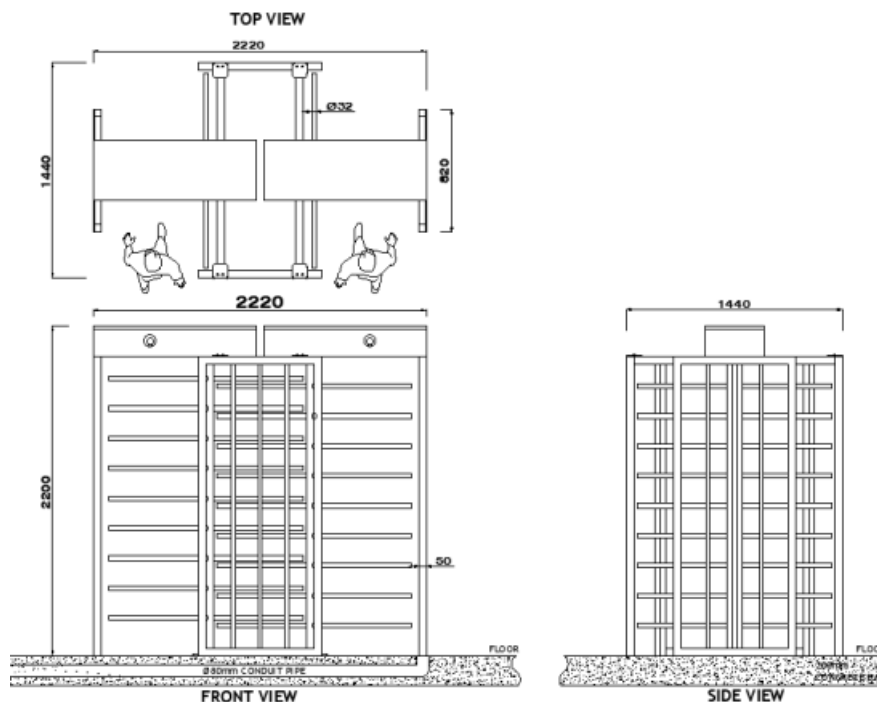

Smart Infocom Pvt. Ltd.